

## Sleeve frame - VC-TR4/5M - 1852927

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sleeve frame, without PE, for contact insert modules, type 4, number of insert modules 5

The illustration shows the version VC-TR 1/2 M



### Key commercial data

Packing unit	1
Minimum order quantity	5
Catalog page	Page 358 (PC-2009)
GTIN	 4 017918 134334
Custom tariff number	85389099
Country of origin	POLAND

### Technical data

#### General data

Design	VC4
Height	27.5 mm
Width	95.2 mm
Color	black
Ambient temperature (operation)	-40 °C ... 100 °C
Material	PA-GF
Housing material	Plastic
Inflammability class according to UL 94	V0

### Classifications

#### eclass

eCl@ss 4.0	27140816
eCl@ss 4.1	27140816
eCl@ss 5.0	27189239

# Sleeve frame - VC-TR4/5M - 1852927

## Classifications

### eclass

eCl@ss 5.1	27189239
eCl@ss 6.0	27144001
eCl@ss 7.0	27144001

### etim

ETIM 2.0	EC000007
ETIM 3.0	EC000007
ETIM 4.0	EC000007
ETIM 5.0	EC000007

### unspsc

UNSPSC 6.01	43172601
UNSPSC 7.0901	31261501
UNSPSC 11	43172601
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

## Approvals

### Approvals

---

#### Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

#### Ex Approvals

---

#### Approvals submitted

---

### Approval details

UL Recognized


cUL Recognized

cULus Recognized

## Sleeve frame - VC-TR4/5M - 1852927

### Drawings

Dimensioned drawing

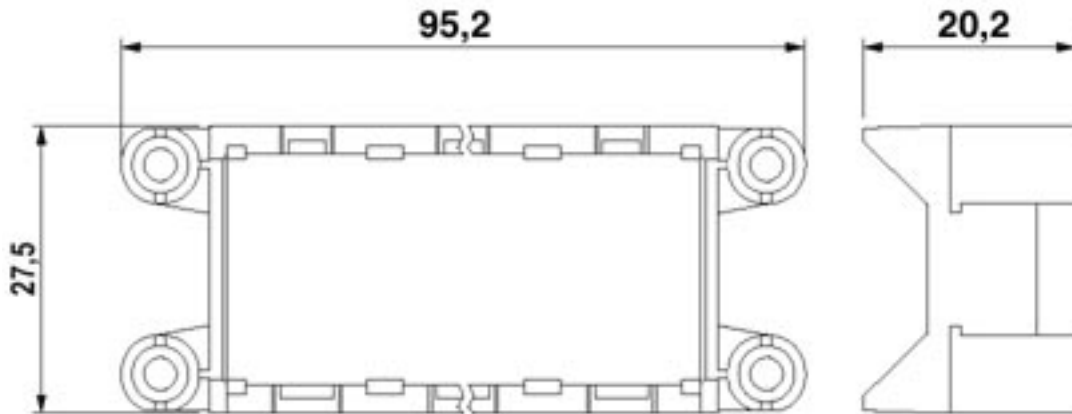

© Phoenix Contact 2012 - all rights reserved  
<http://www.phoenixcontact.com>