

FEATURES

- Free Analysis Software - [click here for web page](#)
- Simple and Easy to Use
- Small and Lightweight
- High Speed - 3.2 KHz Sampling Rate
- Rechargeable
- Characterizes Vibration Profile for Energy Harvesting Applications
- Dust Proof Enclosure
- Simple Analysis & Configuration Software





APPLICATIONS

- Characterizing Energy Harvesting Vibrations
- Equipment Installation Verification
- Vibration Characterization for Damping Purposes
- Condition Based Maintenance
- Equipment Monitoring
- Bearing Monitoring

DESCRIPTION

The Slam Stick™ is a high speed ultra portable rechargeable data logger capable of measuring acceleration in all three axes. The device uses a USB Port for on the fly configuring, charging and downloading of data. Simple configuration software allows users to tailor the device to their specific needs.

PRODUCT DIMENSIONS

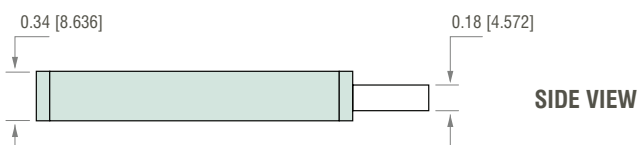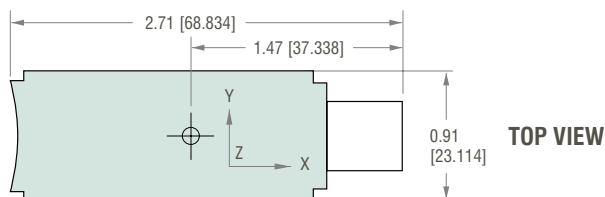

* Dimensions in Inches [Millimeters]

The configuration options include an adjustable delay time before each measurement, different measurement durations, and a trigger based on a pre-determined acceleration level. Free analysis software allows for complete vibration characterization enabling the user to determine the frequency content of their given vibration.

The Slam Stick™ can be used for many different applications including energy harvesting vibration characterization, modal surveys and equipment monitoring. Simply configure the device for your application, mount the device on your vibrating structure, hit the button and download the data to your computer.

SPECIFICATIONS

| Accelerometer | LOG-0001 |
|--|---|
| Range | ± 16 g |
| Sampling Rate: Maximum Minimum | 3.2 kHz 100 Hz |
| Amplitude Response Within ±5% Accuracy (X, Y) | 0 to 300 Hz |
| Amplitude Response Within ± 5% Accuracy (Z Axis) | 0 to 500 Hz |
| Transverse Sensitivity | < 10% |
| Natural Frequency | > 6000 Hz |
| Bandwidth | 0 to 1000 Hz |
| Noise Density | 430µg/√Hz for Z Axis, 290µg/√Hz for X, Y Axis |
| Resolution | 13-bit (~3.9mg/LSB) |

| Environmental | | |
|-----------------------------------|----------------|--|
| Operating Temperature | -40°C to +80°C | |
| Accurate Temperature ¹ | -20°C to +60°C | Accelerometer Accuracy is within ±5% |
| Storage Temperature | -30°C to +40°C | 25°C is Recommended to Preserve Battery Life |
| Recharging Temperature | 0°C to +45°C | |
| Humidity | 0 to 95 %RH | Non-condensing |
| Shock Limit | > 100 g | 10,000g Raw Accelerometer Shock Rating |

| Physical | | |
|---------------|-----------------------|---|
| Mass | 16 grams | |
| Dimensions | 0.34" x 0.91" x 2.71" | See Product Dimensions for Axis Direction |
| Case Material | Polycarbonate/ABS | |





| Miscellaneous | | |
|------------------|---|---|
| Battery Life | > 15 Minutes @ 3.2 kHz Sampling > 90 Minutes @ 100 Hz Sampling | |
| Battery Lifetime | 2 years | Battery needs to be charged at a minimum twice a year |
| Storage Capacity | 16 MB (~ 8.4 million samples) | 15 Minutes recording @ 3.2 kHz, or 7 hours @ 100 Hz |

| Analysis/Configuration Software Specifications | | |
|--|---------------|---|
| Compatible Operating Systems | Windows | |
| Interface | USB | |
| Maximum # of Data Samples | > 500 Million | Analysis of Data is Available during Import |

| Software-Main Features | |
|------------------------|---|
| Statistics | FFT and spectrograms can be generated for every sensor channel. Absolute maximum, minimum, as well as sampling rate and range of each sensor channel is provided. |
| Logger Configuration | Configure the sampling frequency, calendar wake, time delay, recording duration, and g-level triggers. |
| Export Data | Ability to export all data in a CSV format for use with Excel, MATLAB, or other analysis software packages. FFT and Spectrogram can also be exported. The time range of exported data is user selectable. |

| Part Number | Product Description |
|-------------|--|
| LOG-0001 | ± 16 g Acceleration, Data Logger. Included: Analysis Software. |

PREFORMANCE PLOTS

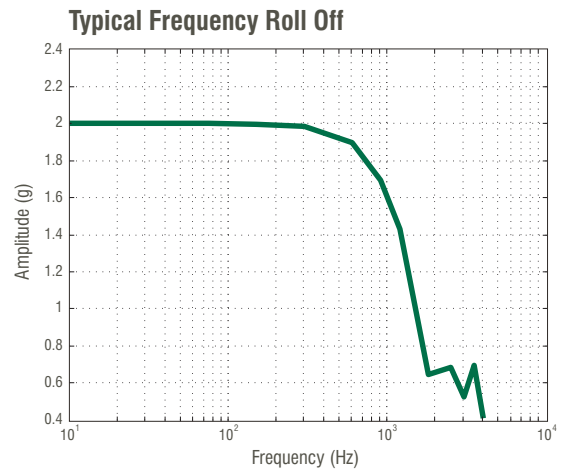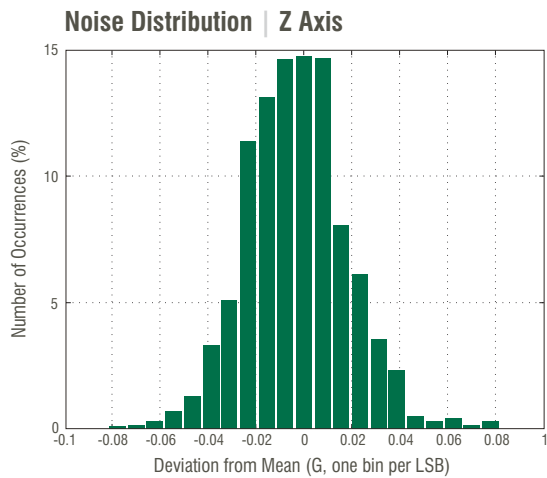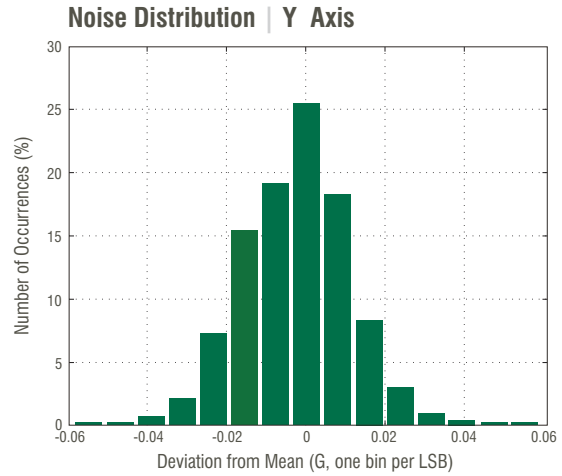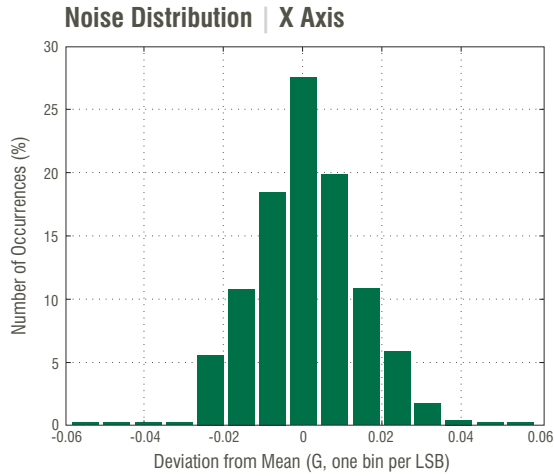

For the noise measurement, a sample Slam Stick recording was taken at room temperature with no vibrations present. The plots above represent the distribution of noise in the recorded data for each axis. This distribution is approximately Gaussian, with the majority of samples falling very close to the correct value and less frequent outliers falling further from the correct value. This distribution is typical of random noise present in any measurement.

Frequency roll off data was taken by exciting the Slam Stick at a constant amplitude (1 gee in this case) over a range of frequencies from 10 Hz to 3200 Hz. The measured vibration amplitude from the Slam Stick was then plotted versus frequency. Note that the roll off is severe after ~500 Hz in the Z axis. This roll off occurs at ~300 Hz in the X and Y axes. Different devices performed differently after this frequency and amplitude data should not be trusted when above this frequency. Frequency data is not impacted by this roll-off.