


**Material**

- ① Terminal body(Contact pin): Brass
- ② Wire guard: Stainless steel
- ③ Surface of solder tail: Tin plated
- ④ Insulator(housing): Thermoplastic (UL94V-0), GREEN(RAL6018/T)

**Electrical**      cULus/VDE

Voltage rating: 300VAC/450VAC  
 Current rating: 10A/10A  
 Wire range: 0.75-1.5mm<sup>2</sup>  
 Solid wire(AWG): 14-24  
 Stranded wire(AWG): 14-24  
 Pull force:  
 Screw:  
 Wire strip length: 9-10mm  
 Withstanding Voltage: 1.6KV/2.5KV  
 Operating temperature: -40°C to +115°C  
 Soldering temperature: 250°C±10°C/5 Sec  
 Safety Approval:

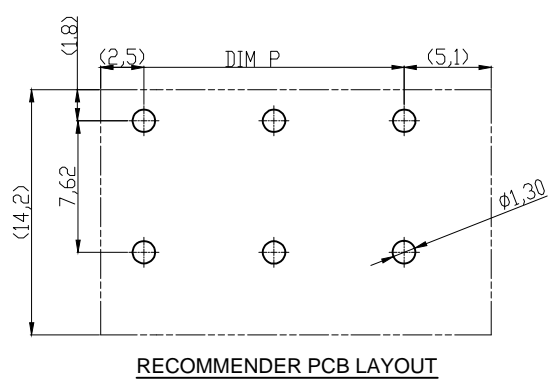

**DIMENSION**

L	Nx7.62
P	(N-1)x7.62

N=Number of poles

Poles	Tolerance	
	DIM L	DIM P
2p-6p	±0.20	±0.20
7p-12p	±0.25	±0.25
13p-24p	±0.40	±0.40

**RoHS compliant**  
Unit: mm



Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	19.04.2010	Alex
X.	±0.50	③	Delete the Wrong dimension 37.51	09.01.2017	Winnie	Approved	09.01.2017	Winnie
X.X	±0.30	②	Add the UL File No.	19.04.2016	Winnie			
X.XX	±0.10	①	Update	16.04.2013	Amy			
DIM	TOL	①						
X.°	±1°	①						
		①	Drawn	19.04.2010	Alex			
Angle	TOL	Id.	Modification	Date	Name			



ASSMANN WSW-No. <b>A-TB762-HAxxH</b>	
Drawing-No. <b>ASS 4127 CO</b>	rev03
Replace	Sheet