


Aug.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

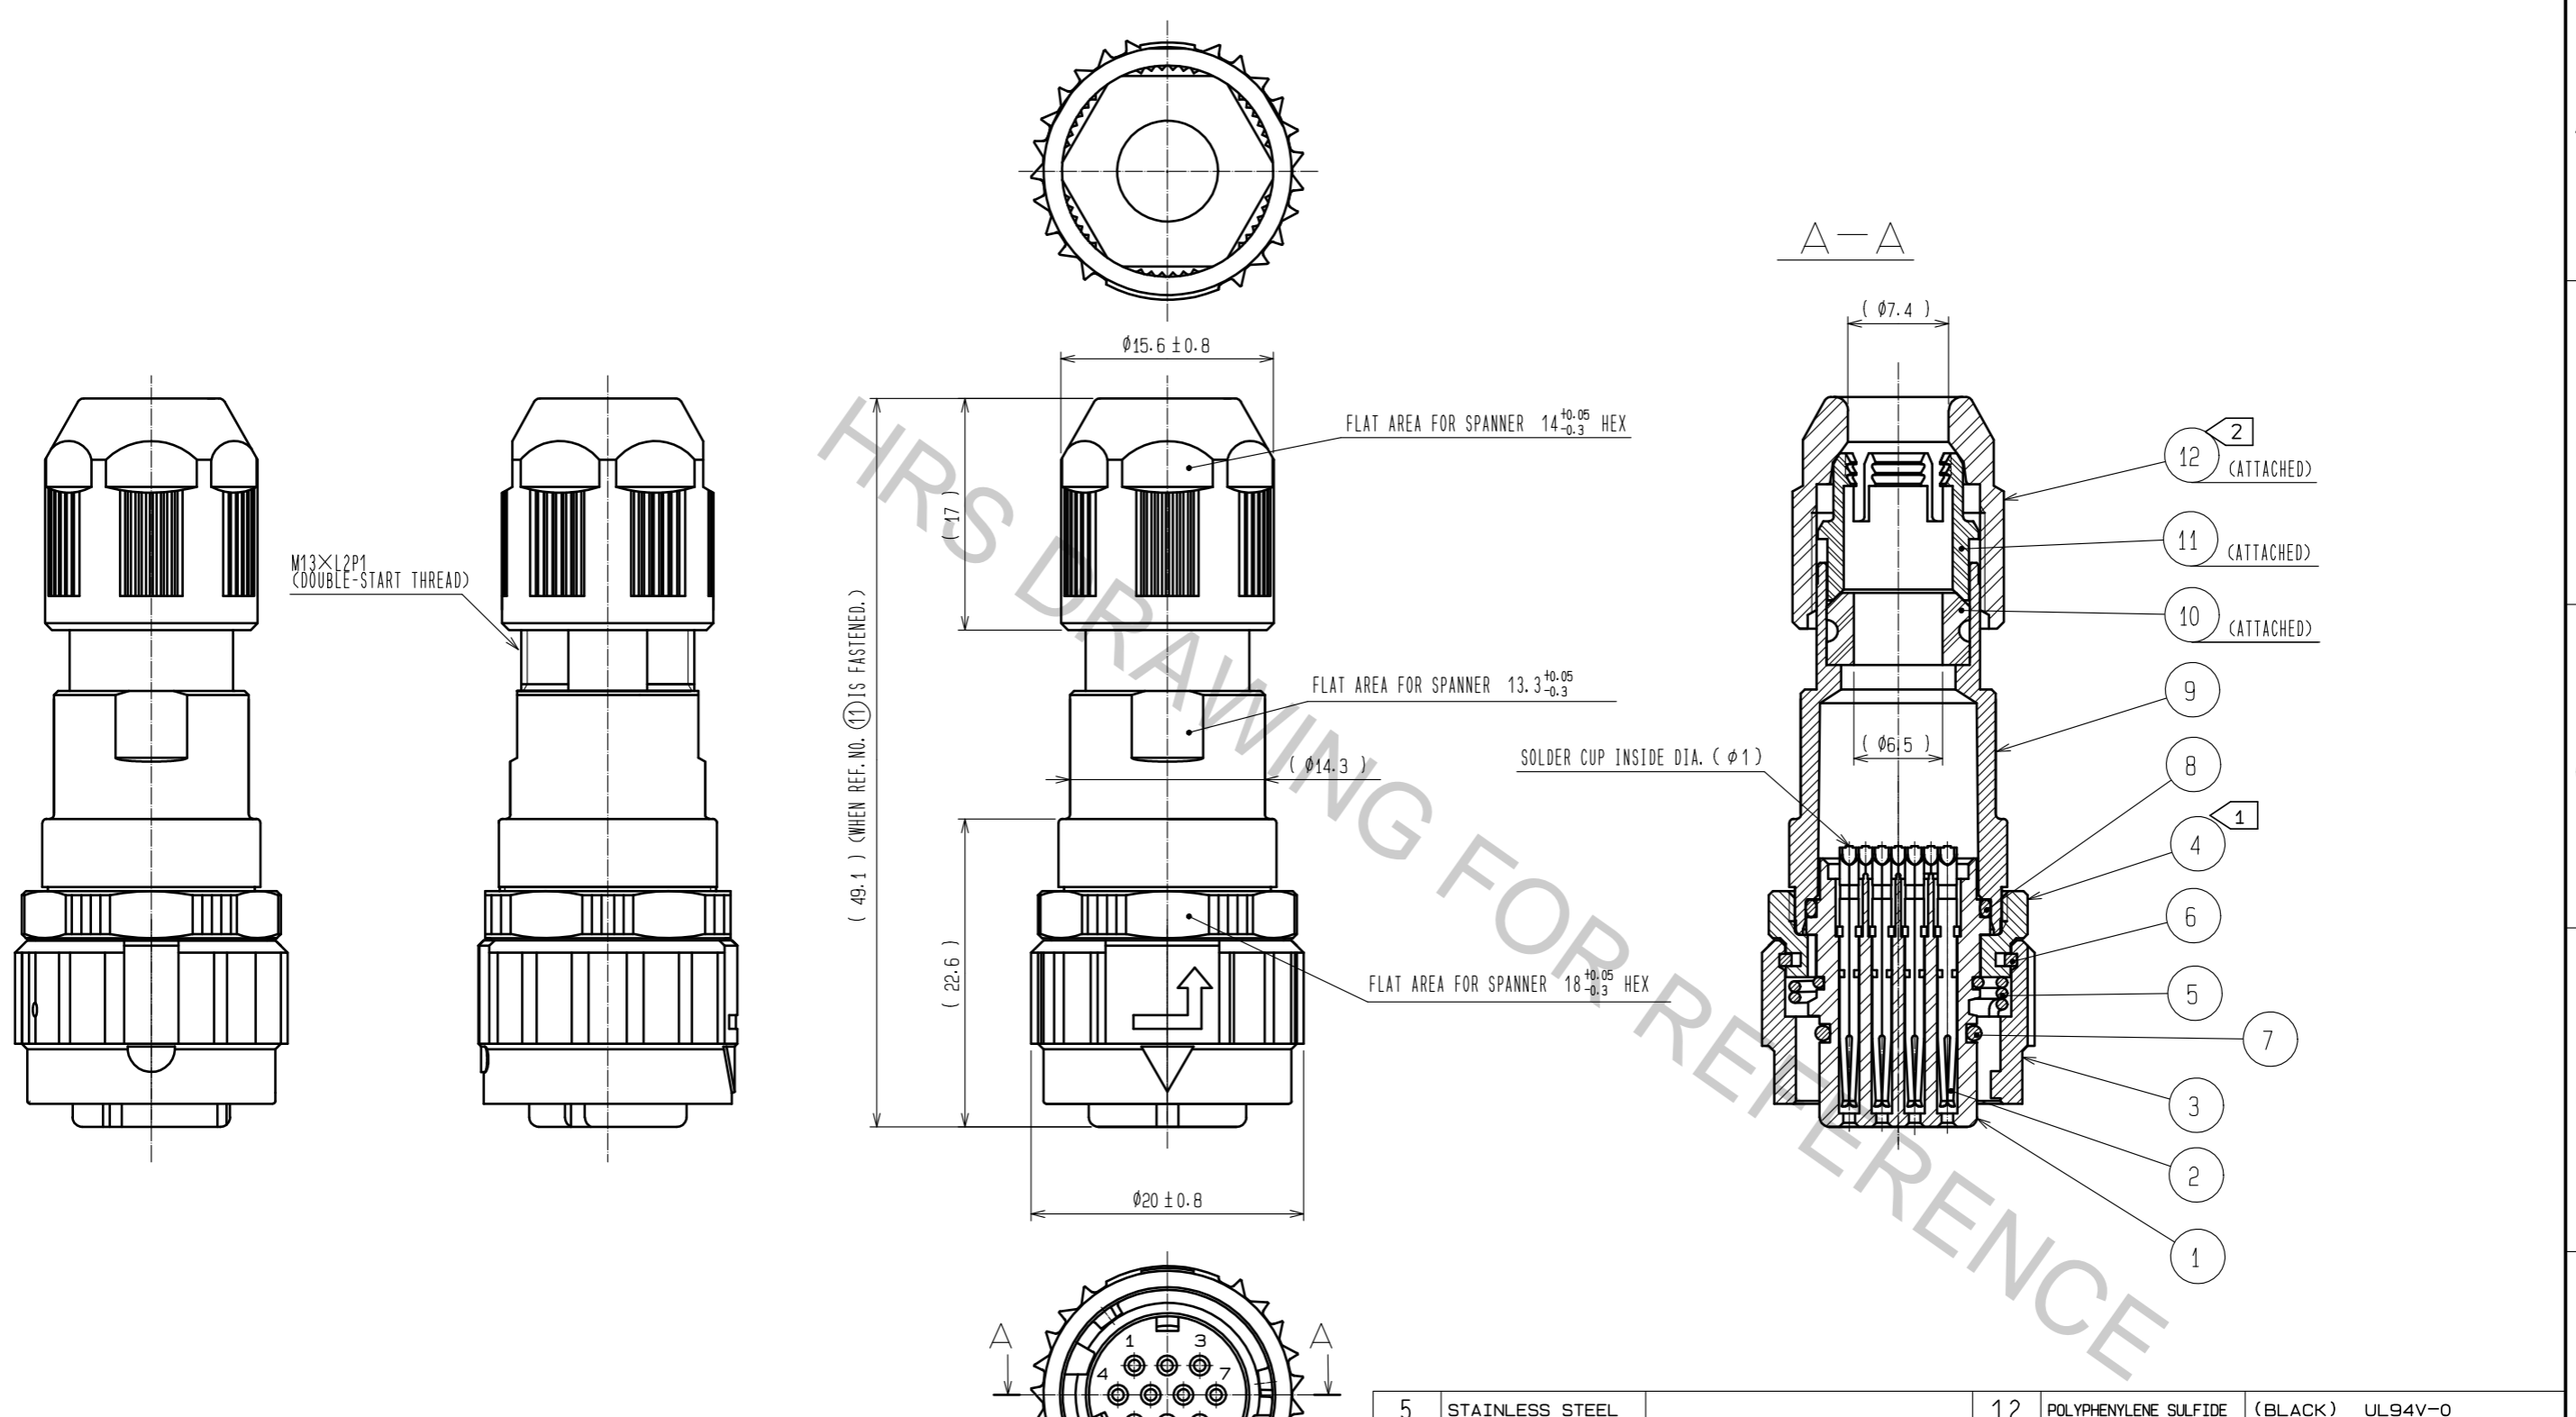

NOTES

- THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ④: 0.9 TO 1 N · m.
 THE RECOMMENDED ADHESIVE OF REF NO. ④: LOCTITE 243 MADE BY HENKEL JAPAN LTD.
- THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑫: 0.9 TO 1 N · m.
 THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
- THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE (BLACK) UL94V-0	
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE (WHITE) UL94V-0	
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
2	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.2μm min. TERMINAL AREA:GOLD FLASH. UNDER PLATING:NICKEL 2μm min.	9	ALUMINIUM ALLOY NICKEL PLATING	
			8	ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
			7	ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
1	POLYPHENYLENE SULFIDE (BLACK) UL94V-0		6	PHOSPHOR BRONZE NICKEL PLATING	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS	SYMBOL	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm		2 : 1					
APPROVED :HY. KOBAYASHI 18.02.26				DRAWING NO. EDC-115624-31-00			
CHECKED :HY. KOBAYASHI 18.02.26				PART NO. HR08D-12WPA-10S(31)			
DESIGNED :DS. MATSUNE 18.02.24				CODE NO. CL108-0219-7-31			
DRAWN :AI. NISHIYAMA 18.02.16							