

06

G

S

F

А

Е



_

SHELL TYPE : Jam nut Receptacle

SHELL SIZE : 17


CONTACT TYPE : Standard Crimp Contact


PLATING : Z = Black Zinc Nickel

Н

-Durability	: 500 Mating cycles					
-Delivered with Souriau contacts and Accessories						
-Temperature Range	_: -65°C to +175°C					
-Salt Spray	: 500 hours					
-Mass	: 48.6 g ± 10%					
BASIC SERIES:	8D	7	-	17	Ζ	

O		ω		A	
					4
LAYO	UT SHOWN AS EXA	MPLE			3
due to a use of the Specifications iss (profession	t be liable for any r the Products which sued by either of th al recommendation Country FR N: 8D717Z(h does not cone Parties or n, technical n Juris	omply with by a third party		2
irst Release	- by			 MOD N°	
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series					
→ www.s	General linear Tolerances: ±)M	NPRDS / PROJEC 859 This document is t SOURI it must not be re communicated with	the property of AU eproduced or	1
	SOURIAU [8D717Z06			SHEET	
			1		

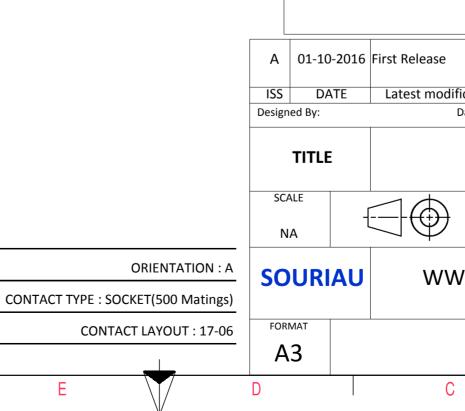

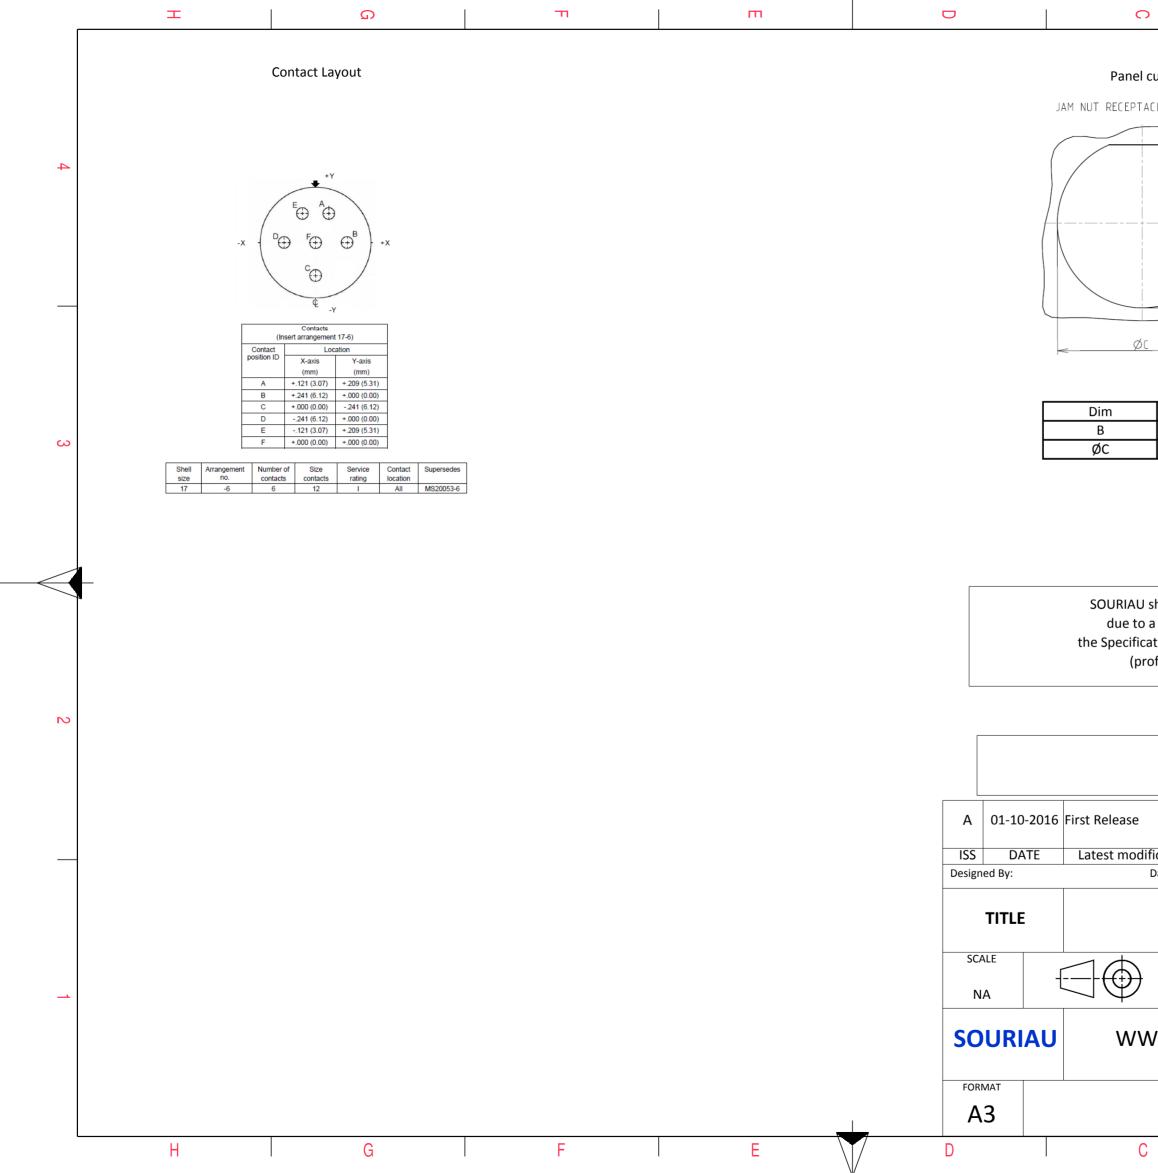

0		ω		Þ	
l cutout	t				
TACLE (T	YPE 7)				
					4
	Nominal 0.73+0/-0.25 2.01+0.25/-0				3
U shall not be liable for any non-conformity or damage o a use of the Products which does not comply with cations issued by either of the Parties or by a third party professional recommendation, technical notice.) Country Jurisdiction & Control List					
	FF		Not Listed		2
PN: 8D717Z06SA					
dificatio Date:	n - by		CUSTOMER	MOD N	•
Aluminium Receptacle 8D series					
)	General linear Tolerances: ±		NPRDS / F 85		1
WW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
SOURIAU DRG N°			SHEET		
	8D717	Z06SA-C		2/2	
С		В		А	