


SD-D/SC/LA/GY

Order No.: 2963491

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2963491>Rail-mountable socket, with light indicator, housing color: gray, with
screw connection, national version: Germany, housing width 45 mm**Commercial data**

GTIN (EAN)	 4 017918 606190
sales group	H070
Pack	5 pcs.
Customs tariff	85366990
Catalog page information	Page 602 (IF-2009)

Product notesWEEE/RoHS-compliant since:
07/20/2006

[http://
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)
Please note that the data given
here has been taken from the
online catalog. For comprehensive
information and data, please refer
to the user documentation. The
General Terms and Conditions of
Use apply to Internet downloads.

Technical data**General data**

Nominal voltage U_N	250 V AC
Nominal current I_N	16 A AC
	10 A DC
Status display	Glow lamp or LED with preresistor

Contact material	CuZn37
For country-specific use in	D
Color	gray
Insulating material	PA
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 60 °C
Standards/regulations	IEC 83 DIN 49440-1
Width	45 mm
Height	75 mm
Depth	70.5 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Type of connection	Screw connection
Stripping length	8 mm
Screw thread	M3

Certificates / Approvals




Certification

GOST, VDE-PZI

Diagrams/Drawings

Circuit diagram

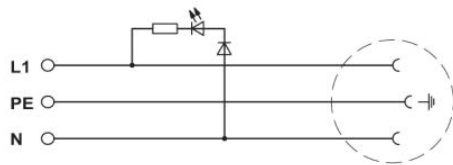

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;