

SUMMARY

Wires

Low	2
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0



Image is for illustrative purpose only

Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Male solder
IP rating	50
Cable Ø	5.30 - 6.50 mm
Matching parts	PLG.M0.2NL.LN
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	PA*: Straight plug with cable collet
Keying	1 key (alpha=0; Plug: male contact; Receptacle: female contact)
Housing Material	PSU (Polysulfone), black
Cable Fixing	∅ 5.3 - 6.5 mm
Variant	N : Black collet nut

Performance

Configuration	1P.M02 : 2 Low Voltage
Insulator	
Rated Current	10 Amps

Specifications

Contact Type:	Solder
Max. Matings:	2000
Contact Dia.:	1.3 mm (0.0512in)
Bucket Dia.:	1.1 mm (0.04in)
Max. Solid Conductor:	0.5 mm ² (AWG 20)
Max. Stranded Conductor:	0.5 mm ² (AWG 20)


R (max): 3.5 mOhm
 Test voltage (kV rms) Contact-contact: 1.2
 Air clearance min. (mm) or Creepage distance min. (mm): 1.3

Others

F ret (min): 50 N
 F ret (max): 150 N
 IP Rating: 50

DRAWINGS

Draws

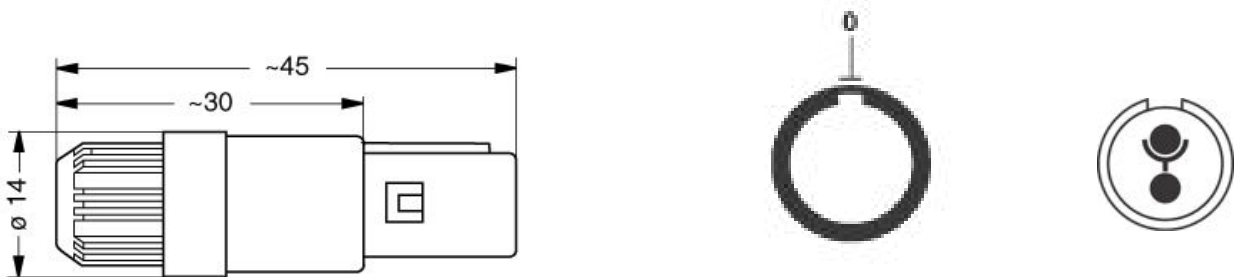

Dimensions

	A	L
mm.	14	45
in.	0,55	1,77

RECOMMENDED BY LEMO


Tools

None

Cables

102 080	PVC	Grey	
120 184	PVC	Black	
120 500	PVC	Grey	

Property of LEMO SA. All rights reserved
 This document is not contractual

120 751	PVC	Grey	
220 750	PVC	Grey	