


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	-		0	RELEASED(FJ00-1433-01)	23APR01	K.R	S.M
			A	REVISED(FJ00-0921-02)	25APR02	K.R	S.M
			B	REVISED(FJD0-0123-03)	01AUG03	K.R	S.M

-2 : AS SHOWN
 -2 : 本図

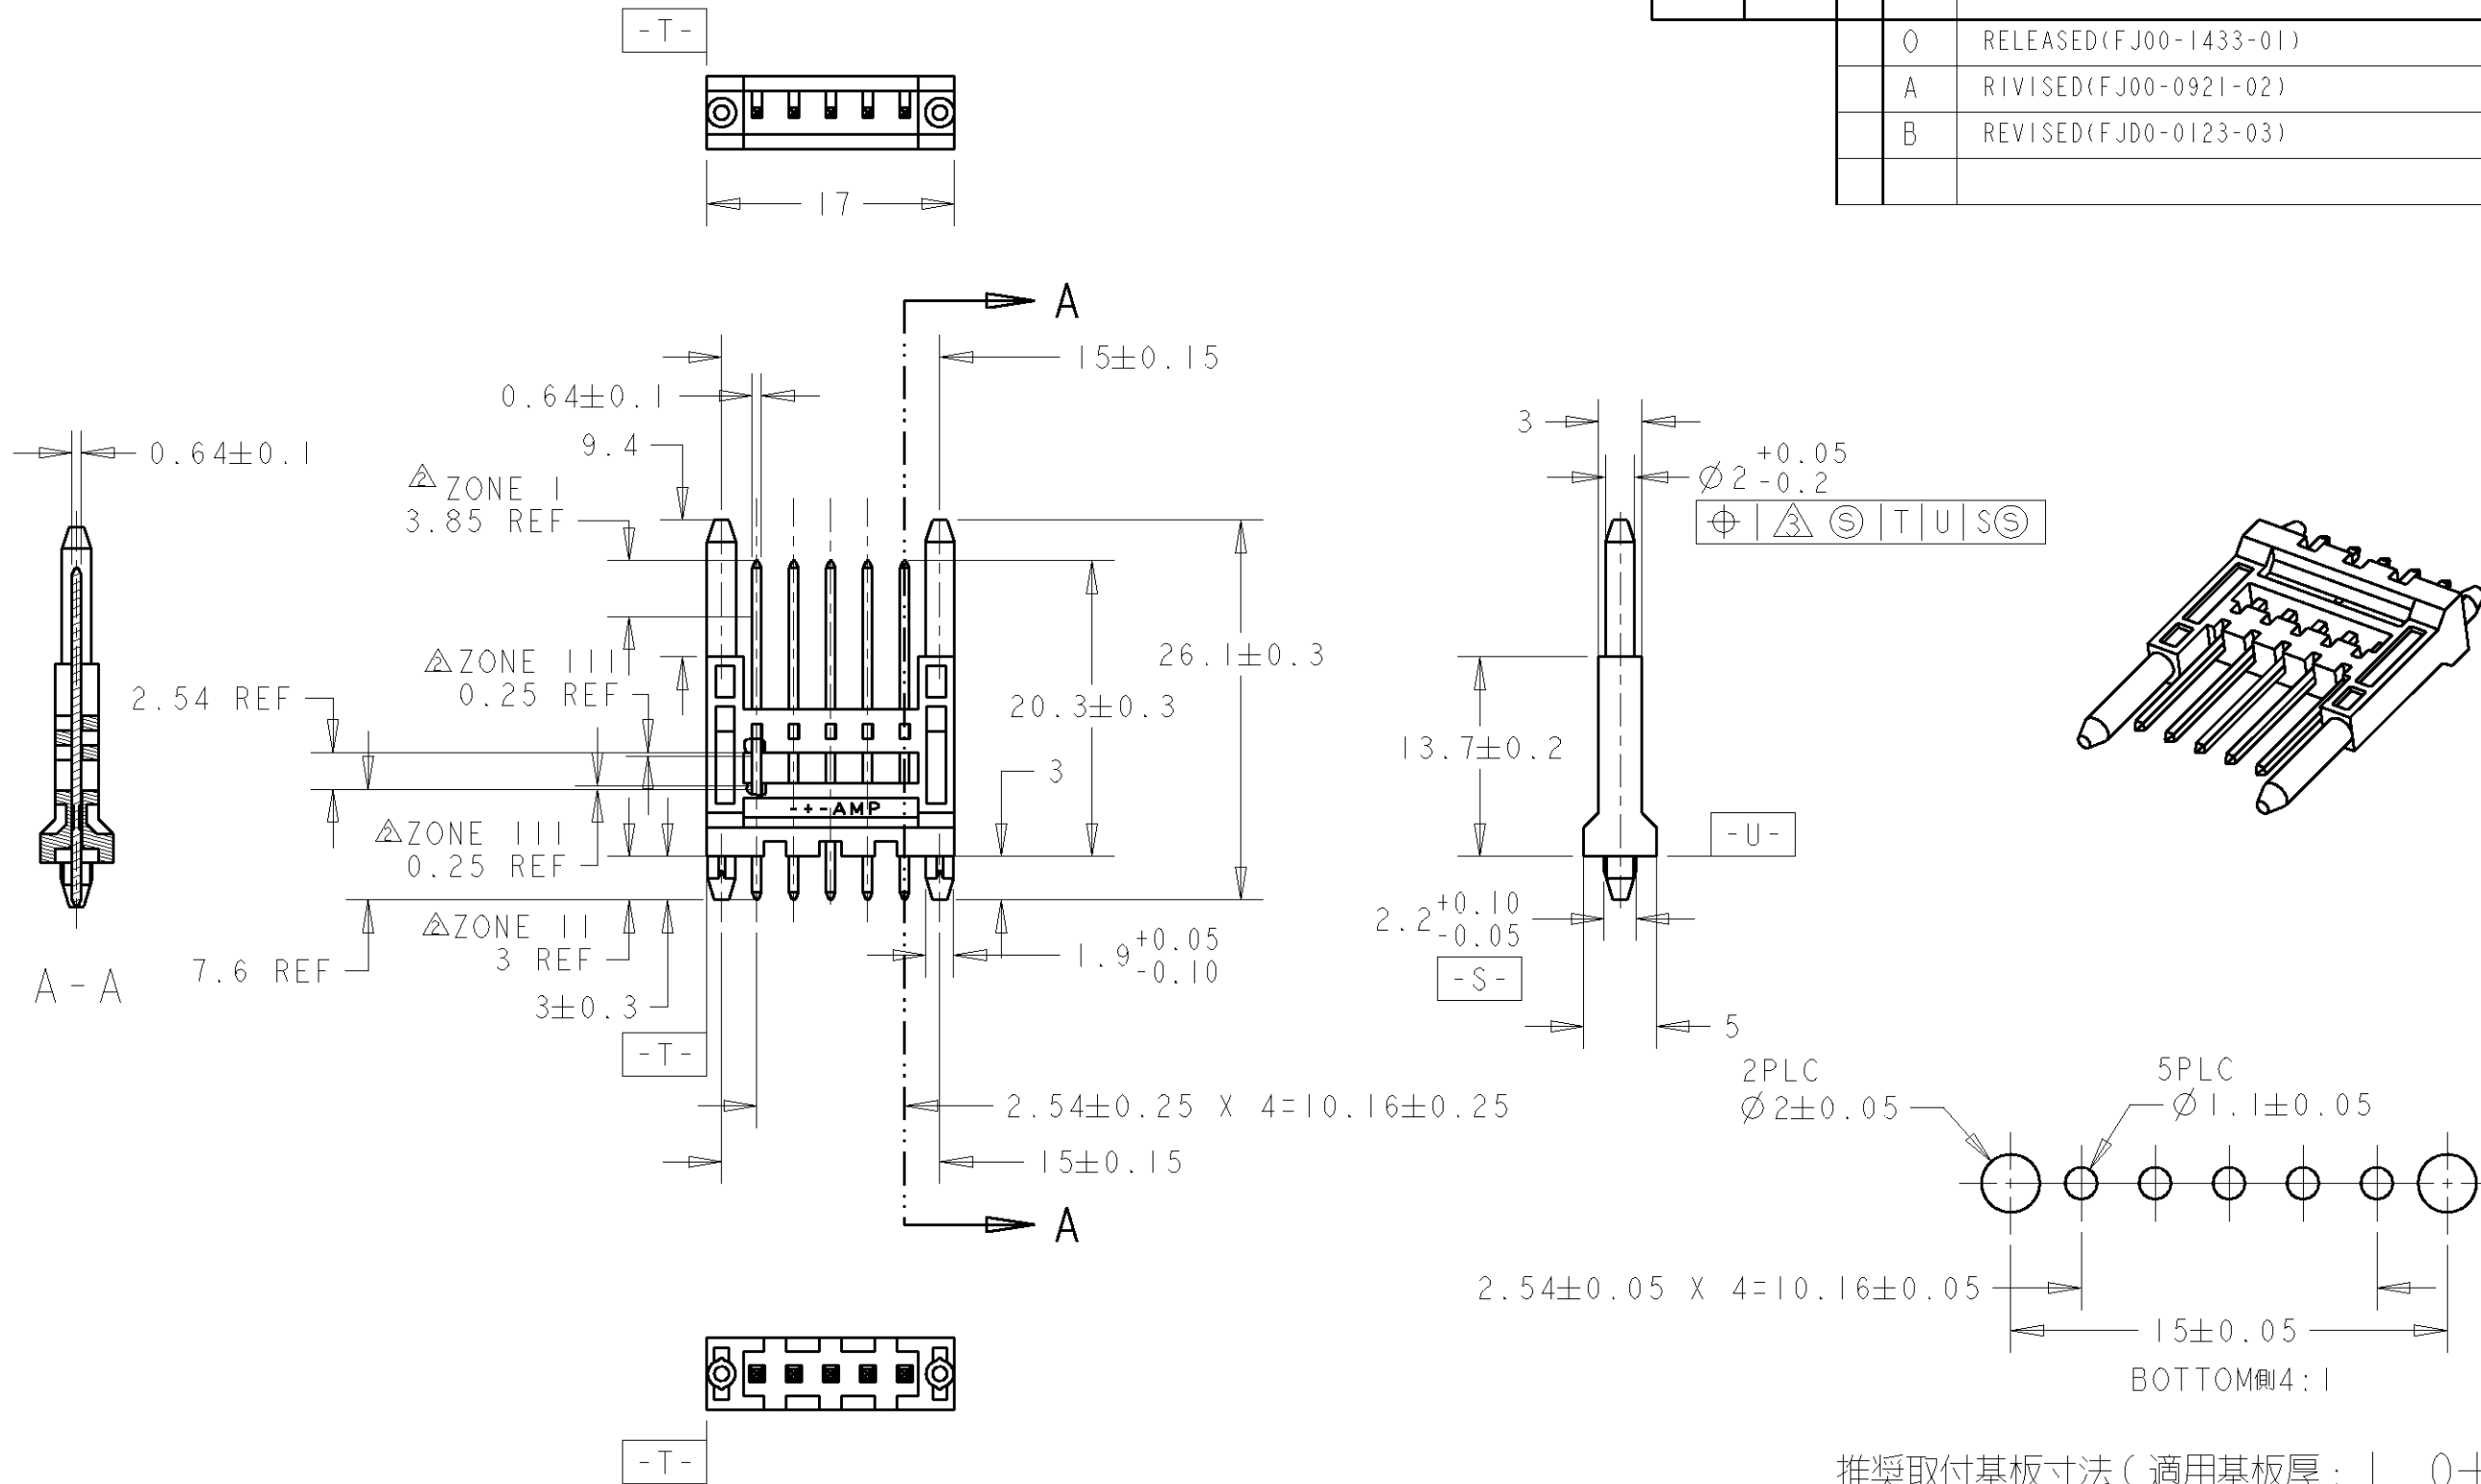

推奨取付基板寸法 (適用基板厚: 1.0±0.15)
 RECOMMENDED P.C. BOARD LAYOUT (BOARD THICKNESS: 1.0±0.15)

- △材料 ハウジング: ガラス入り熱可塑性ポリエステル (UL94V-0)、色: 黒
 コンタクト: 黄銅
- △仕上げ 全面: ニッケルめっき下地 1.27µm以上
 接触部 (ZONE I): 金めっき 0.2µm以上
 基板取付部 (ZONE II): 錫めっき 2µm以上
 非めっき部 (ZONE III)
- △AMPマーク側: 1.76, キャビティマーク側: 0.4
- △MATERIAL HOUSING: POLYESTER OF GLASS FILLED THERMO PLASTIC (UL94V-0), COLOR: BLACK
 CONTACT: BRASS
- △FINISH UNDER: Ni PLATING ALL SURFACE 1.27µm MIN
 CONTACT AREA (ZONE I): Au PLATING 0.2µm MIN
 P.C. BOARD ATTACHMENT AREA (ZONE II): TIN PLATING 2µm MIN
 NOT PLATED AREA (ZONE III)
- △AMP MARK SIDE: 1.76, CAVITY MARK SIDE: 0.4

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN	K. RIKU	23APR01	Tyco Electronics AMP K.K. Kawasaki, Japan					
DIMENSIONS: mm		CHK	S. MANABE	23APR01						
		APVD	S. MANABE	23APR01						
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.25 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC	108-5727							
MATERIAL SEE NOTE 1		APPLICATION SPEC	-							
FINISH SEE NOTE 2		WEIGHT	1.14g							
		CUSTOMER DRAWING	SIZE	A3	CAGE CODE	00779	DRAWING NO	C=1376778	RESTRICTED TO	-
			SCALE	2:1	SHEET	1	OF	1	REV	B