THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DS	–

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED	21.JUN.12	T.K	M.K

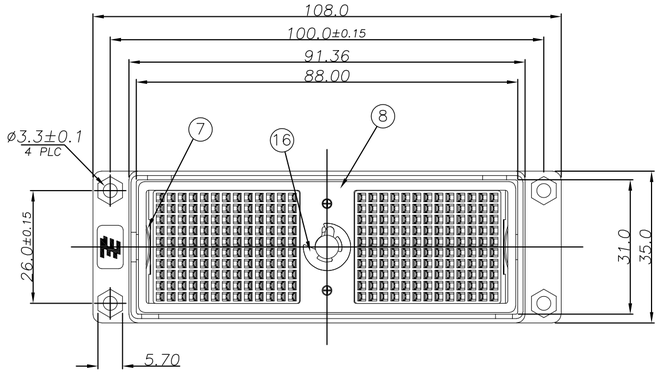

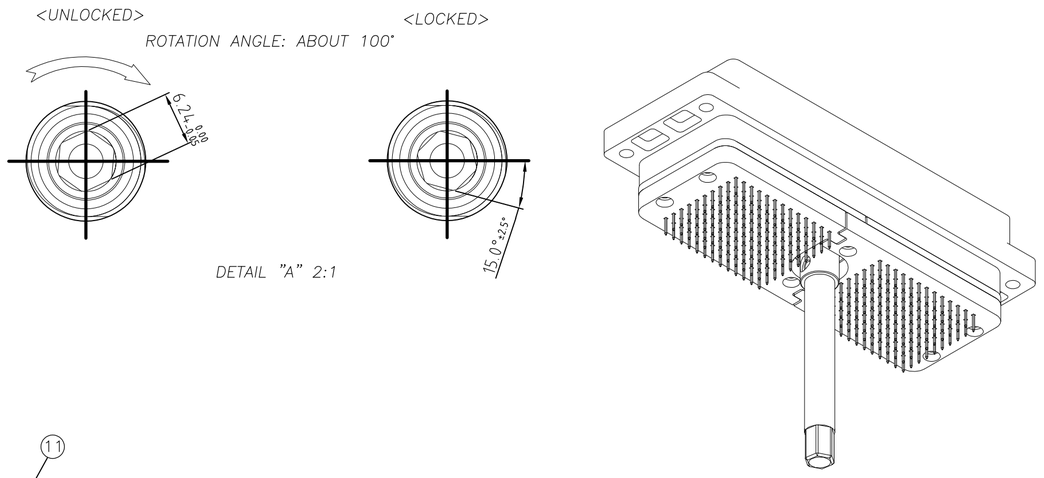

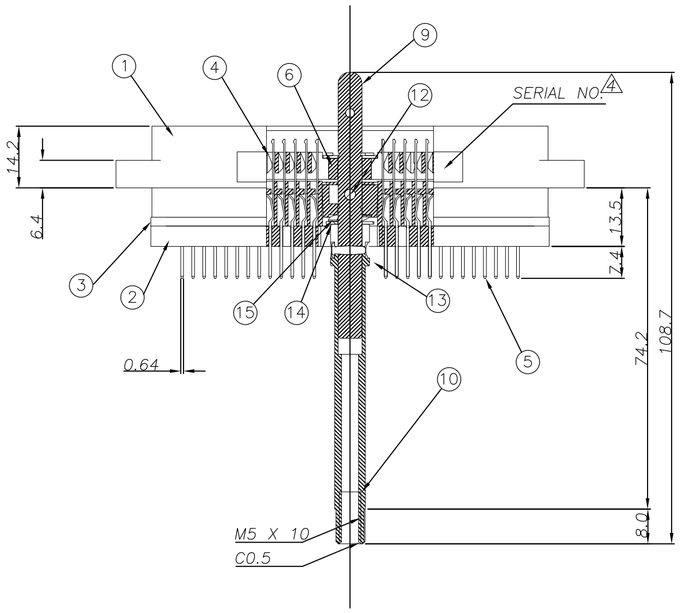

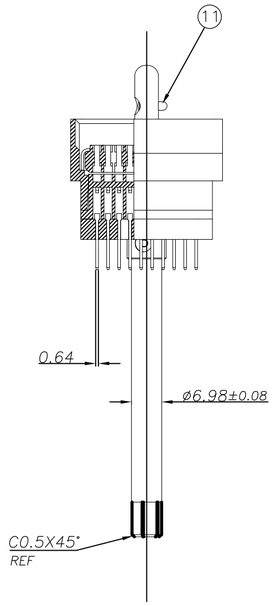

NOTE.
1. PLATING :
CONTACT AREA : 0.8um MIN. GOLD OVER 2.5um MIN. NICKEL.
OTHERS : GOLD FLASH OVER 2.5um MIN. NICKEL.
2. TORQUE : 93.1N·cm MAX. (9.5Kg·cm MAX.)
3. GENERAL TOLERANCE: ±0.3.
4. SERIAL NUMBER: YYMMDD−XXXX.

ITEM	DESCRIPTION	MATERIAL	FINISH	REMARK	Q'ty
18	BOLT M2x8	STAINLESS STEEL	–	–	6
17	BOLT M2x4	STAINLESS STEEL	–	–	10
16	E−RING	STAINLESS STEEL	–	–	1
15	WAVE WASHER	STAINLESS STEEL	–	–	1
14	WASHER	STAINLESS STEEL	–	–	2
13	CAM SHAFT PIN(L)	STAINLESS STEEL	–	–	1
12	CAM SHAFT PIN(M)	STAINLESS STEEL	–	–	1
11	CAM SHAFT PIN(S)	STAINLESS STEEL	–	–	1
10	CAM SHAFT BODY	STAINLESS STEEL	–	–	1
9	CAM SHAFT HEADER	STAINLESS STEEL	–	–	1
8	COVER	STAINLESS STEEL	–	–	1
7	SPRING	STAINLESS STEEL	–	–	2
6	PLUG LOCKING GUIDE	THERMOPLASTIC	–	–	2
5	TERMINAL	COPPER ALLOY	⚠1	–	260
4	PLUG SLIDE PLATE	PPS GF30	–	UL 94V−0	2
3	PLUG HOUSING	PBT GF30	–	UL 94V−0	2
2	PIN GUIDE	PC GF30	–	UL 94V−0	2
1	PLUG DIECASTING	ALUMINUM	NICKEL PLATING	–	1

PART NO. 2005931−1

DESCRIPTION M−ZIF CONN. PLUG 260P WITH HEX/LONG SHAFT

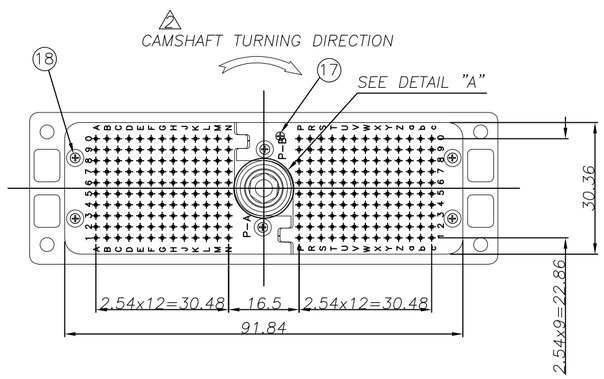

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN: OH KWON
CHK: M.KIMURA
APVD: M.KIMURA
PRODUCT SPEC: 108−61097
APPLICATION SPEC: –
WEIGHT: 163G

TE connectivity

NAME: M−ZIF CONN. PLUG 260P SOLDER TYPE (WITH LONG SHAFT)

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C−2005931	–

CUSTOMER DRAWING | SCALE 1/1 | SHEET 1 OF 1 | REV C1